


- Octal SMT Package contains both transmit and receive transformers
- Models matched to leading transceivers
- RoHS Compliance
- Operating temperature range: 0°C to +70°C



Electrical Specifications @25°C								
Part Number	Turns Ratio (±2%)	OCL PRI (mH Min)	LL (uH Max)	CWW (pF Max)	DCR(25°C) (Ω Max)	HI-POT	Primary Pins	
	Pri:Sec	100KHz, 0.1V	100KHz 0.1V	100KHz 0.1V	Pri		Transmit	Receive
TE4008CG	1CT:2&1:2CT	1.2&1.2	0.6&0.6	35&35	1.2	1500VAC	4-5,9-10,14-15,19-20	1-3,6-8,11-13,16-18

MECHANICAL

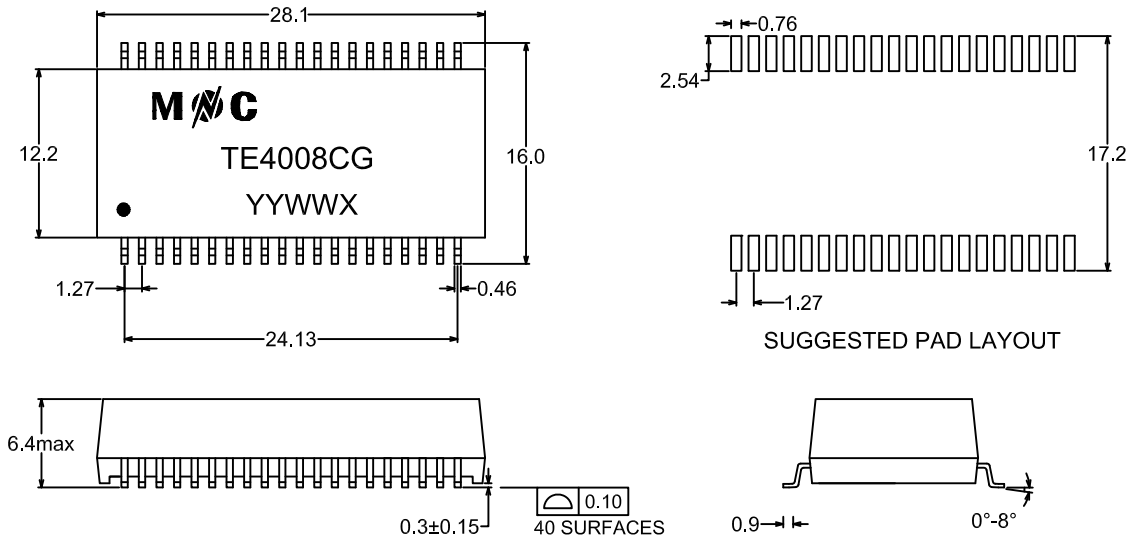

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

